


BNC CONNECTORS AVAILABLE WITH BALL & CHAIN:


PART NUMBER	CONNECTOR TYPE	FREQUENCY RANGE	VSWR (max.)
RCX6BM	MALE	DC to 2 GHz	1.10:1
RCX6BF	FEMALE		
RCX7BM	MALE	DC to 4 GHz	1.20:1
RCX7BF	FEMALE		

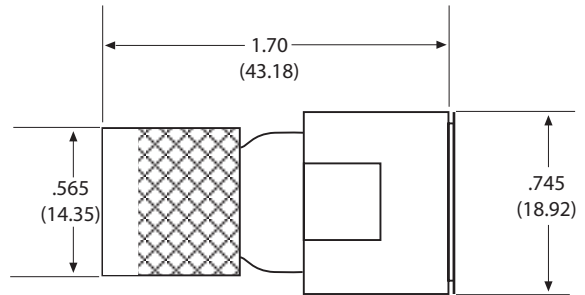

2 WATTS (1KW peak)

TNC CONNECTORS AVAILABLE WITH BALL & CHAIN:


PART NUMBER	CONNECTOR TYPE	FREQUENCY RANGE	VSWR (max.)
RCX5TM	MALE	DC to 8 GHz	1.25:1
RCX5TF	FEMALE		
RCX6TM	MALE	DC to 4 GHz	1.15:1
RCX6TF	FEMALE		

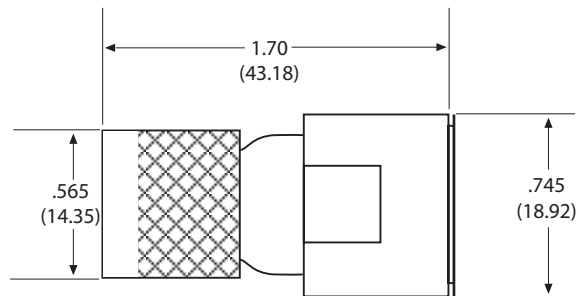

5 WATTS (2KW peak)

"N" TYPE CONNECTORS AVAILABLE WITH BALL & CHAIN:

PART NUMBER	CONNECTOR TYPE	FREQUENCY RANGE	VSWR (max.)
RCX1NM	MALE	DC to 12 GHz	1.25:1
RCX1NF	FEMALE		
RCX3NM	MALE	DC to 12 GHz	1.15:1
RCX3NF	FEMALE		
RCX5NM	MALE	DC to 8 GHz	1.25:1
RCX5NF	FEMALE		
RCX6NM	MALE	DC to 4 GHz	1.15:1
RCX6NF	FEMALE		

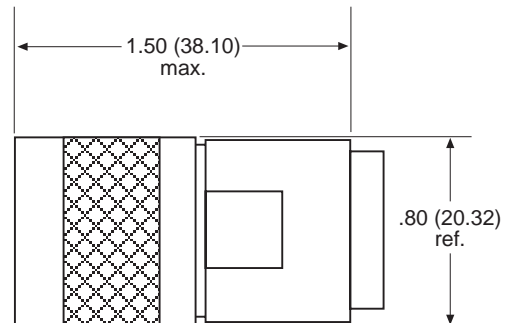

5 WATTS (2KW peak)