


PERFORMANCE SPECIFICATIONS:


PART NUMBER	CONNECTOR TYPE	VSWR (max.)
RFT25SFA	SMA FEMALE	DC to 4 GHz - 1.15:1 4 to 8 GHz - 1.25:1 8 to 12 GHz - 1.30:1
RFT25SMA	SMA MALE	
RFT25SFB	SMA FEMALE	DC to 8 GHz - 1.20:1 8 to 12 GHz - 1.25:1 12 to 18 GHz - 1.30:1
RFT25SMB	SMA MALE	
RFT25SFC	SMA FEMALE	DC to 8 GHz - 1.20:1
RFT25SMC	SMA MALE	DC to 8 GHz - 1.20:1
RFT25SFD	SMA FEMALE	DC to 4 GHz - 1.15:1
RFT25SMD	SMA MALE	DC to 4 GHz - 1.15:1

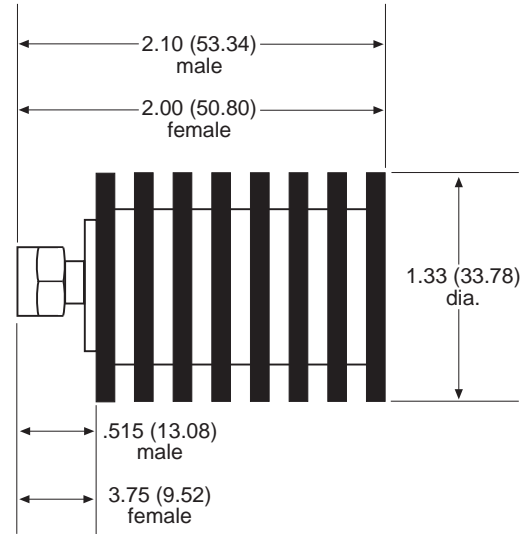

25 WATTS (2KW peak)

PERFORMANCE SPECIFICATIONS:

PART NUMBER	CONNECTOR TYPE	VSWR (max.)
RFT50SFC	SMA FEMALE	DC to 8 GHz - 1.20:1
RFT50SMC	SMA MALE	DC to 8 GHz - 1.20:1
RFT50SFD	SMA FEMALE	DC to 4 GHz - 1.15:1
RFT50SMD	SMA MALE	DC to 4 GHz - 1.15:1
RFT50SFE	SMA FEMALE	DC to 2 GHz - 1.10:1
RFT50SME	SMA MALE	DC to 2 GHz - 1.10:1

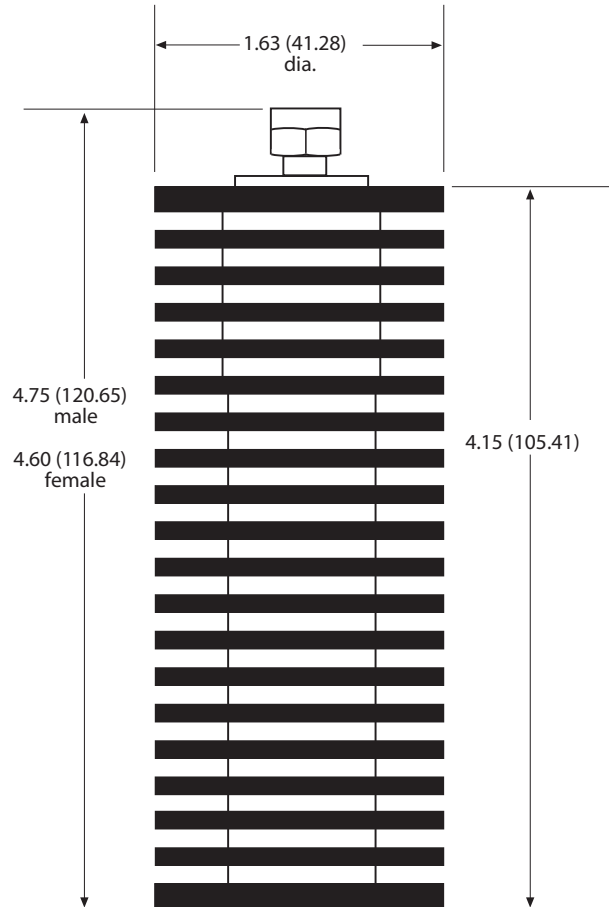

50 WATTS (3KW peak)