

CHIP ATTENUATORS

SURFACE MOUNT

RNCAXXVW3




General Specifications

Substrate: Alumina
 Resistive Material: Thick Film
 Terminals: Silver Over Nickel
 Temperature Range: -55°C to +150°C
 Power Rating: 1 Watt




Attenuation (dB)	Attenuation Accuracy (dB)	Frequency (GHz)	VSWR (max)
0 - 9	+0.5	DC-4.0 4.0-8.0	1.25:1 1.35:1
10 - 12	±1.0	DC-4.0 4.0-8.0	1.25:1 1.35:1
13 - 14	-2.0/+0.5	DC-4.0 4.0-8.0	1.25:1 1.35:1
15 - 18	-3.0/+0.5	DC-4.0 4.0-8.0	1.25:1 1.35:1
19 - 20	-4.0/+0.5	DC-4.0 4.0-8.0	1.35:1 1.35:1

RNCAXXVW3

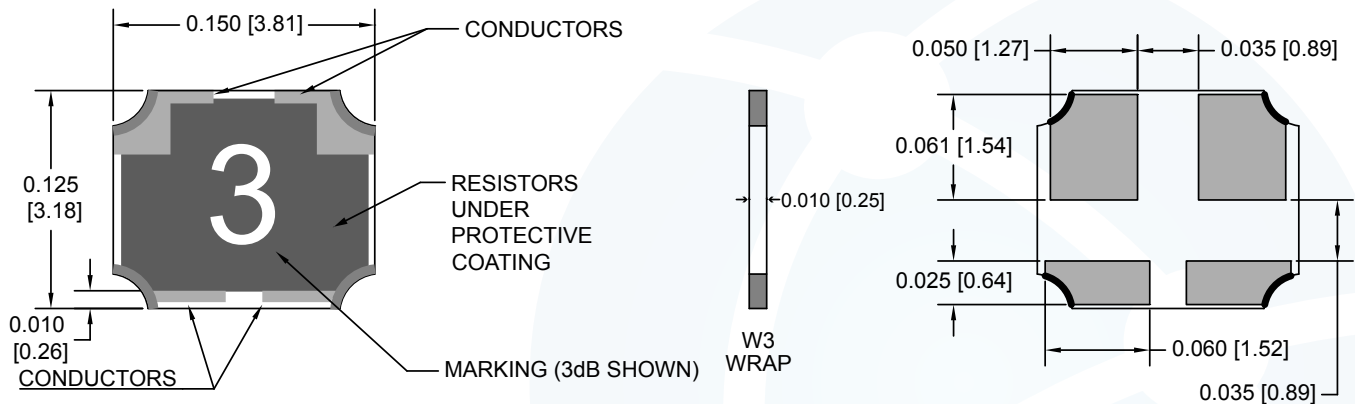

Dimensions are in inches [mm], Tolerance: .XXX = ±0.010, .XX = ±0.015

Ordering Information:

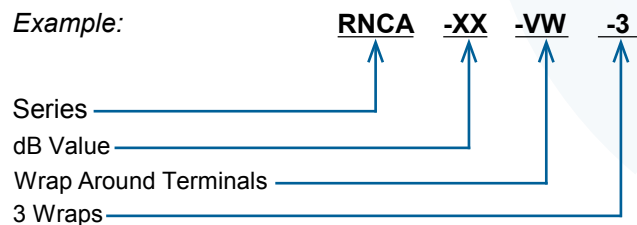

DERATING CURVE

